



Pressure Transient Transient Data Logger

The Sound Choice
for Leak Detection.™

Pressure Transient is a highly-versatile data logger designed for effective network transient logging.

Featuring advanced cellular telemetry and an innovative 'event window selection' the operator can now send transient alarm information and a selectable window of fast logged data before and after the event, or for set time-based windows.

Transient logging is no longer a purely survey operation, but can now be part of permanent network monitoring for standard flow and pressure logging. Transients are immediately identified so remedial action can be taken, avoiding bursts and infrastructure damage.

Key Features and Benefits

- **Fast logging capability:** up to 100 time per second, ideal for transient monitoring changes
- **Event window selection:** select data around transient for transmission
- **Telemetry:** NBIoT LTE-based cellular communication standard with fallback 2G capability
- **Large memory:** 4 GB internal flash memory enables up to 2 billion readings
- **Fully waterproof:** the IP68 rating has be tested at 10m depth over a 24 hour period
- **Long-term monitoring:** up to 5 years battery life
- **External battery packs:** supports accelerated logging and dial-in regimes
- **Detailed analysis:** specialist software supplied to enable detailed analysis
- **Flexible:** internal and external sensor options



Applications

Pressure Transient transmits data through an integral modem with GPRS/2G, 4G, LTE-M (Cat-1) and other NBIoT cellular options available.

In addition to pressure transient logging, flow and pressure channels can be added to log other network parameters (Enhanced Network Logging) for comprehensive transient and general network monitoring. Sampling can be operator selected through a wide range of options to 100 samples per second.

The full range of HWM external battery packs can be connected to power accelerated dial-in regimes and extended periods of maximum sample rate. These can simply be exchanged on site as required.

MONITORING ASSETS, DELIVERING DATA, BRINGING CONTROL

www.fluidconservation.com


Pressure Transient Transient Data Logger

Logger Features

| | |
|--------------------|---|
| Frequency | Standard data logging - 1 sample per second to 1 sample per day. Fast logging - 1 to 100 samples per second |
| Logger ID | up to 8 alphanumeric characters |
| Clock | On-board 24 hour real time clock with date facility |
| Dimensions | 199H x 125W x 66D (mm) (7.7" x 4.7" x 2.8") |
| Construction | Die-cast aluminium enclosure |
| Weight | 1.6kg (3.5lb) |
| Operating Temp. | -20 to 70°C (-5 to 160°F) |
| Ingress Protection | IP68 |
| Power | Lithium-Thionyl Chloride cell operational for 1 to 5 years depending on usage. External power input (+12V or HWM battery box). Battery boxes to support more frequent dial-in and long term accelerated logging. |
| Alarms | Minimum or maximum duration triggered threshold alarm per channel. 16 Alarms per logger. Each alarm out comment field 16 characters. User definable threshold transient alarm. User selected window of data around transient transmitted with alarm. |

Communication

| | |
|-------------------------|--|
| USB | USB 2.0 connection by MIL connector for connection to PC or tablet. |
| Internal Cellular Modem | Cellular modem supporting 2G/3G/NB-IoT/LTE-M (Cat-1) with SMS backup where available - contact HWM for available options |

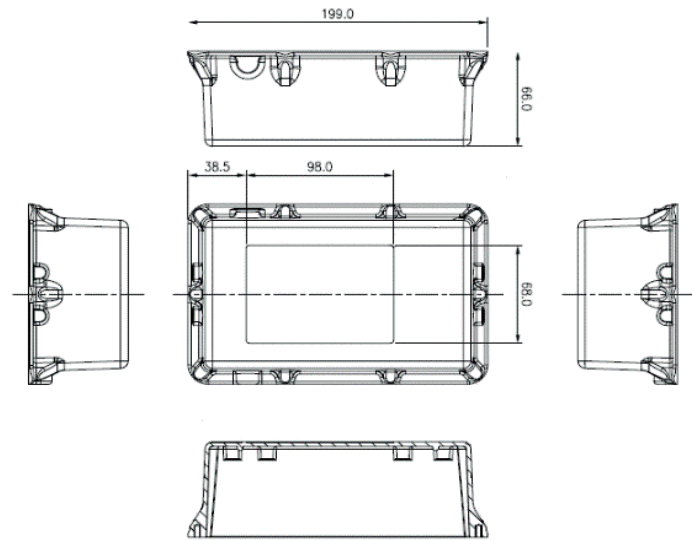

Sensor Input Options

| | |
|----------|---|
| Analogue | External Pressure Transducer. Supplied with quick fit connector. 0-30 bar, accuracy $\pm 0.1\%$ |
| Memory | 4 GB internal flash memory enables up to 2 billion readings |

Impress

External Pressure Transient Transducer

The Impress Pressure Transient Transducer is an industrial pressure transmitter with a piezo-resistant ceramic pressure sensor.

The construction gives it excellent media compatibility with a stainless steel housing and sealing O ring to ensure the product is suitable for a wide range of applications.



All images, text and designs are protected by international and UK copyright law and remain the property of HWM. It is against the law to copy or use any of the content from HWM website or literature without the written consent of HWM. HWM Ltd. reserve the right to vary the specification.



Fluid Conservation Systems
1960 Old Gatesburg Rd Ste 150
State College, PA 16803

Tel: +(800)531-5465
Email: info@fluidconservation.com
Web: www.fluidconservation.com

MONITORING ASSETS, DELIVERING DATA, BRINGING CONTROL