



The Sound Choice  
for Leak Detection™

fluidconservation.com

(800) 531-5465

1960 Old Gatesburg Road, Suite #150  
State College, PA 16803

# Hydrophone 2 Sensor

## Pressure Monitoring and Leak Detection Sensor

<b>Operating Temperature</b>	-20 to 60°C (-5 to 140°F)
<b>Storage Temperature</b>	-40 to 60°C (-40 to 140°F)
<b>Ingress Protection</b>	IP68
<b>Unit Gross Weight</b>	1.054kg (2lb 3oz)
<b>Safety Tested</b>	to 360 PSI
<b>Material: Body</b>	Stainless Steel 316 - DWI regulation 31
<b>Material: Sensor</b>	Araldite DFB/HY951 - BS 6920:2014



## PermaNET Web

### Online Data Portal



PermaNET Web is a secure, web-based portal designed to support the PermaNET product range in the remote identification of network leakage.

Supporting acoustic correlation, leak detection and logger programming, PermaNET Web delivers connectivity with multiple loggers and provides the user with numerous ways to view collected data.

## DataGate/DataView

### Secure Data Platforms

Our DataGate and DataView platforms provide access to the devices and the data that they gather. DataGate holds a database of all installations and site details, while DataView provides the collected level data as well as the ability to set and view alarms.

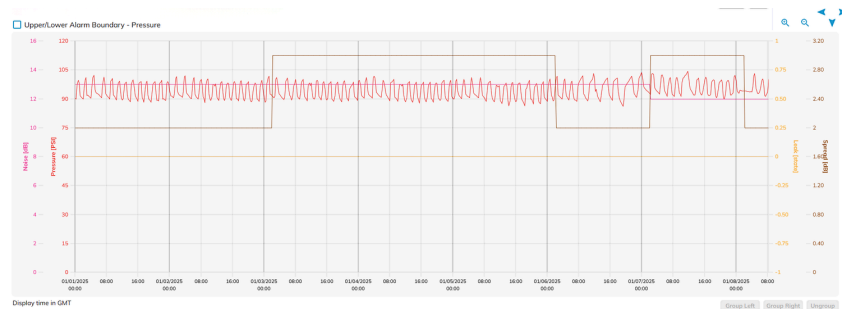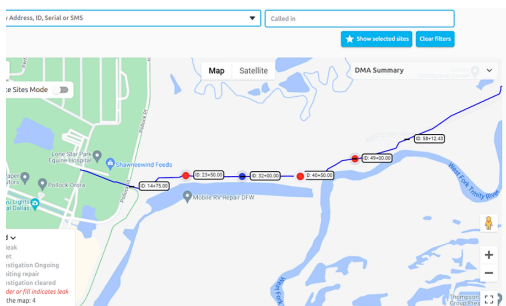

## Key Features and Benefits

- **High Performance:** Enhanced leak detection and correlation capabilities for long pipe lengths, larger diameters, and non-metallic pipes
- **Versatile Design:** Easily screws into Aptlas/boundary box fittings and works with various hydrant adapters and pressure-enabled fittings.
- **Seamless Compatibility:** Fully integrates with Tri-Corr Touch Pro Correlators and PermaNET+ acoustic loggers.

All images, text, and designs are protected by US copyright law and remain the property of FCS. Copying or using any content from FCS's website or literature without the written consent of FCS is against the law. FCS reserves the right to vary the specification.



Learn More