



The Sound Choice
for Leak Detection™

fluidconservation.com

(800) 531-5465

1960 Old Gatesburg Road, Suite #150
State College, PA 16803

Hydrophone 2 Sensor

Pressure Monitoring and Leak Detection Sensor

Operating Temperature	-20 to 60°C (-5 to 140°F)
Storage Temperature	-40 to 60°C (-40 to 140°F)
Ingress Protection	IP68
Unit Gross Weight	1.054kg (2lb 3oz)
Safety Tested	to 25Bar
Life in Service	+5 years
Material: Body	Stainless Steel 316 - DWI regulation 31
Material: Sensor	Araldite DFB/HY951 - BS 6920:2014




PermaNET Web

Online Data Portal

PermaNET Web is a secure, web-based portal designed to support the PermaNET product range in the remote identification of network leakage.


Supporting acoustic correlation, leak detection and logger programming, PermaNET Web delivers connectivity with multiple loggers and provides the user with numerous ways to view collected data.

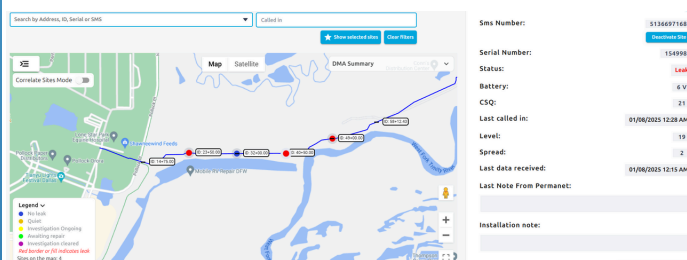

DataGate/DataView

Secure Data Platforms

Our DataGate and DataView platforms provide access to the devices and the data that they gather. DataGate holds a database of all installations and site details, while DataView provides the collected level data as well as the ability to set and view alarms.

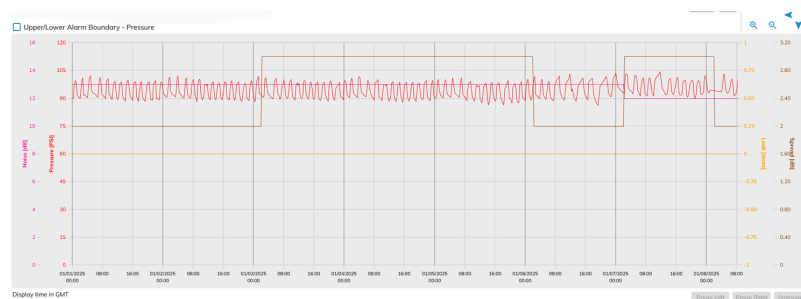

Key Features and Benefits

- High Performance:** Enhanced leak detection and correlation capabilities for long pipe lengths, larger diameters, and non-metallic pipes
- Versatile Design:** Easily screws into Aptlas/boundary box fittings and works with various hydrant adapters and pressure-enabled fittings.
- Seamless Compatibility:** Fully integrates with Tri-Corr Touch Pro Correlators and PermaNET+ acoustic loggers.

All images, text, and designs are protected by US copyright law and remain the property of FCS. Copying or using any content from FCS's website or literature without the written consent of FCS is against the law. FCS reserves the right to vary the specification.



Learn More